




Pneumatic packings for rods (Installable in one-piece groove)

PNY-Packings

Dimension table

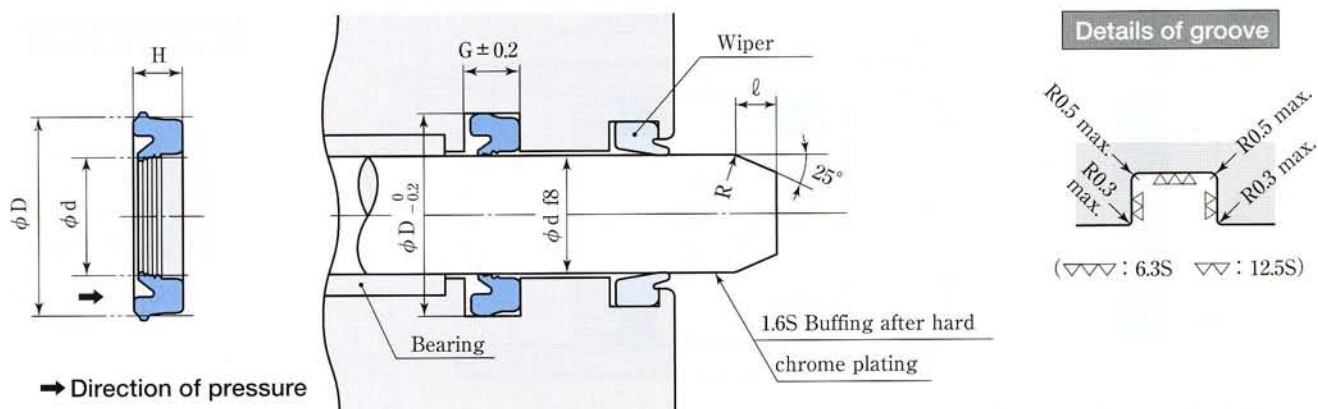

- Note:
- Packings should be installed in the direction specified on the above schematic.
 - Consider adopting divided grooves if one-piece groove is technically adverse.

Dimension table of PNY-Packings

(Unit : mm)

Packing & Groove dimensions					Part No.	
d	D	H	G	ℓ	Standard material (RN 713)	High temperature- resistant material (RF 905)
16	24	5.2	5.7	1.5	PNY-16	
18	26	5.2	5.7	1.5	PNY-18	
20	28	5.2	5.7	1.5	PNY-20	
22	30	5.2	5.7	1.5	PNY-22	
22.4	30	5.2	5.7	1.5	PNY-22.4	
25	33	5.2	5.7	1.5	PNY-25	PNY-25F
28	36	5.2	5.7	1.5	PNY-28	
30	40	6.5	7	3	PNY-30	PNY-32F
32	42	6.5	7	3	PNY-32	
35	45	6.5	7	3	PNY-35	
35.5	45.5	6.5	7	3	PNY-35.5	
36	46	6.5	7	3	PNY-36	
40	50	6.5	7	3	PNY-40	
45	55	6.5	7	3	PNY-45	
50	60	6.5	7	3	PNY-50	
55	65	6.5	7	3	PNY-55	
60	70	6.5	7	3	PNY-60	
63	73	6.5	7	3	PNY-0063001N713	
70	80	6.5	7	3	PNY-70	

- ★ Orders and inquiries are acceptable by part numbers.
- ★ Products with the part numbers in blue back ground are stock items.
- ★ Packings with the part numbers in light Italic require the confirmation of their availability prior to ordering. These items are subject to the abolishment without notice.
Reclamation of an abolished product requires producing the new tooling at your expense.
- ★ Packings are adequately packaged for the optimum storage. Refer to "Cautions" at page 1 for the handling and the storage.

Related products: PGY-Packings, SDR-Wipers and SFR-Wipers