



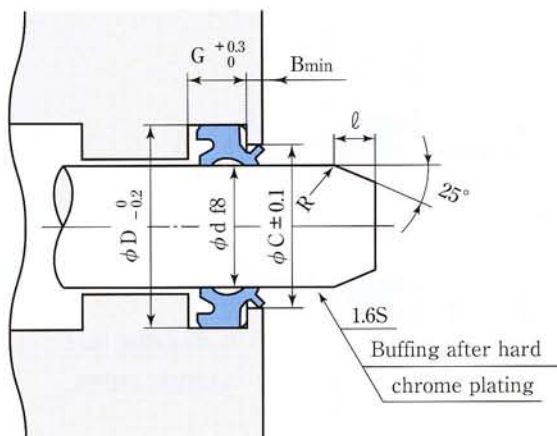


(Installable in one-piece groove)

SCK-Wipers

Dimension table

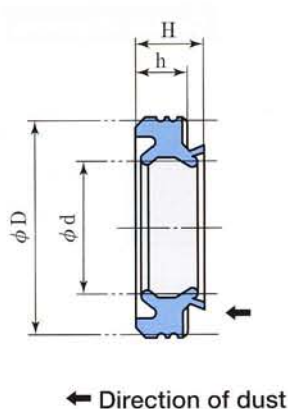

Details of groove



- Note:
- Wipers should be installed in the direction specified in the above schematic.
 - Consider adopting divided grooves if one-piece groove is technically adverse.
 - Apply enough grease (specified at page 10) to the inside of the groove at the installation. Besides, consider a rust control treatment on the surface of ϕC dimension.
 - Refer to the ℓ dimension as it would be differed according to the type of packings to be used together.

Dimension table of SCK-Wipers

(Unit : mm)

Wipers & Groove dimensions							Part No.
d	D	H	h	C	G	B	Standard material (RN 814)
18	30	7.7	5.8	24	6	3	SCK- 18
20	32	7.7	5.8	26	6	3	SCK- 20
25	37	7.7	5.8	31	6	3	SCK- 25
28	40	7.7	5.8	34	6	3	SCK- 28
30	42	7.7	5.8	36	6	3	SCK- 30
32	44	8.7	6.8	38	7	3	SCK- 32
35	47	8.7	6.8	41	7	3	SCK- 35
40	52	8.7	6.8	46	7	3	SCR- 40
45	57	8.7	6.8	51	7	3	SCK- 45
50	62	8.7	6.8	56	7	3	SCK- 50
55	69	10	7.7	62	8	3	SCK- 55
60	74	10	7.7	67	8	3	SCK- 60
65	79	10	7.7	72	8	3	SCK- 65
70	84	10	7.7	77	8	3	SCK- 70
75	89	10	7.7	82	8	3	SCK- 75
80	94	10	7.7	87	8	3	SCK- 80
85	99	10	7.7	92	8	3	SCK- 85
90	104	10	7.7	97	8	3	SCK- 90
95	109	10	7.7	102	8	3	SCK- 95
100	114	10	7.7	107	8	3	SCK-100
105	121	12	8.7	113	9	4	SCK-105
110	126	12	8.7	118	9	4	SCK-110
115	131	12	8.7	123	9	4	SCK-115
120	136	12	8.7	128	9	4	SCK-120
125	141	12	8.7	133	9	4	SCK-125
130	146	12	8.7	138	9	4	SCK-130
132	148	12	8.7	140	9	4	SCK-132
140	160	14	9.7	150	10	5	SCK-140
160	180	14	9.7	170	10	5	SCK-160

★Orders and inquiries are acceptable by part numbers.

★Products with the part numbers in blue back ground are stock items.

★Wipers are adequately packaged for the optimum storage. Refer to "Cautions" at page 1 for the handling and storage.